



X-TREME LIGHT

X-TREME LIGHT



AND X-TREME LIGHT 1000

X-TREME LIGHT 700







Small/medium formats - two models for formats up to 700mm (28") or 1000mm (40") wide up to 10mm (3/8") thick: 2 to 4 25mm (1") or 50mm (2") tape applicators independently programmed on a touchscreen applying multiple differently-configured strips in one pass.

Apply tapes at speeds up to 35m (115')/min

Print, point of sale, packaging, plastics, signage applications.






Widest format of substrate (accepted - edges taped)
Thickest substrate
Shortest strip of tape
Longest strip of tape (*can order longer)
Maximum number of consecutive tape strips ("spots") per sheet (*can order more)
Minimum distance between consecutive tape strips
Minimum distance between parallel tape strips (with 2 applicators side-by-side)
Structure
Speed
Maximum number of tape applicators
Standard tape applicator (tape width) 25mm
Optional tape applicator (tape width) 50mm
Optional tape applicator (tape width) 100mm

810mm (31.9") - 730mm (28.7")	1110mm (43.7") - 1000mm (40")
10mm (just over 3/8")	10mm (just over 3/8")
25mm (1")	25mm (1")
2,5m (8')	2,5m (8')
4	4
25mm (1")	25mm (1")
47mm (1.85")	47mm (1.85")
Desktop + optional tables	Desktop + optional tables
10m (33')/min - 35m (115')/min	10m (33')/min - 35m (115')/min
3	4
3mm (0.12") - 25mm (1")	3mm (0.12") - 25mm (1")
3mm (0.12") - 50mm (2")	3mm (0.12") - 50mm (2")
3mm (0.12") - 100mm (3.9")	3mm (0.12") - 100mm (3.9")

APPLICATION PATTERNS


Our standard machines are used for various product formats: posters, envelopes, pocket folders, packaging, wobblers and free-standing display units. Applying tape on one side, both sides, and all the way around the product but also applying several shorter consecutive strips (so-called "spots" of tape), putting the right amount of tape where it's needed.

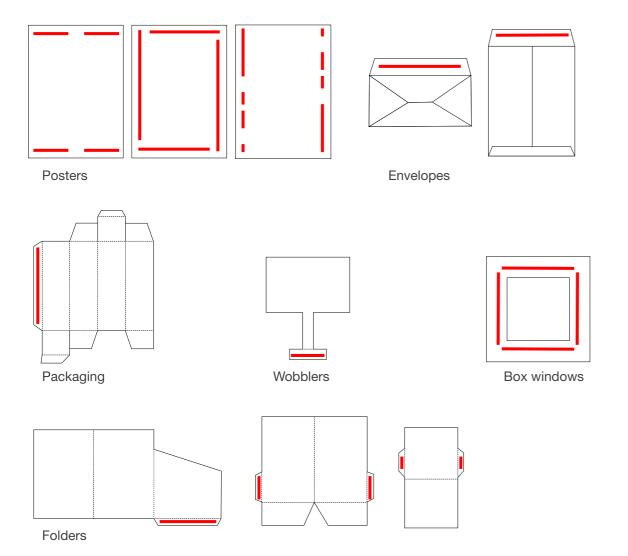

APPLICABLE TAPES

Some tapes are easier to automate than others, but whether your project requires applying a mono-sided masking tape, a transfer tape, a double-sided modified acrylic adhesive with PET carrier and paper liner, a double-sided polyethylene foam tape with modified acrylate adhesive and paper liner, or a double-sided

tackified acrylic adhesive with PET carrier and a red MOPP-film liner or many others, our applicators are designed to apply many types of tape, including extended liner (aka fingerlift) tapes, and we are continuing to expand our capabilities.

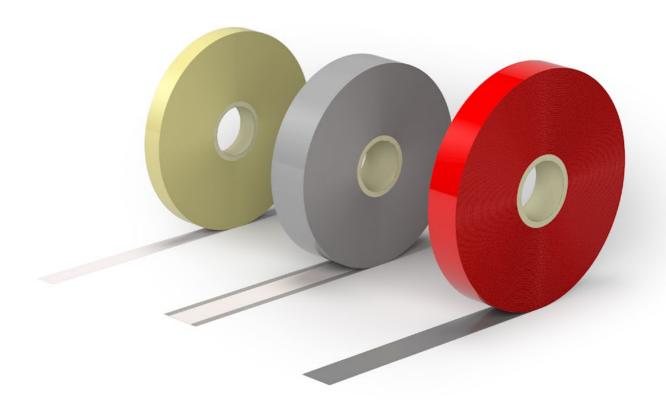

FUNCTIONALITY



Precise micrometric adjustment of the applicator beam height accommodating substrates up to 10mm thick



Laser-assisted applicator guidance to quickly position them where tape is required



Multi-job software capable of saving machine settings for up to 100 jobs



The photocell "sees" many types of substrate material: black, transparent, reflective.. and allows easy placing of tape around die-cut holes





Movable support table to easily position the machine where needed

Magnetic feeding guides for

quick and accurate substrate

alignment




Unloading slide with alignment guides for orderly collection of processed jobs





Feeder with its own support on wheels for the automatic insertion of the sheets to be processed



Ability to apply more than one roll of tape on the same applicator for close parallel tape strips



Ability to apply tape strips starting at 3mm wide



Tape Application Made Easy

Enimac S.r.I. Via Monzoro 58, 20007 Cornaredo (MI) - Italy +39 02 32 87 425

www.enimac.it

